


V6202IR-T04 Series

HD 4MP WDR IP IR Bullet Camera

Infinova[®]
The Integrator's Manufacturer

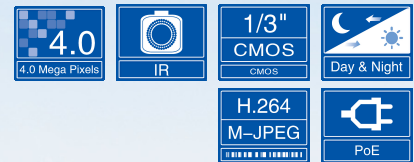

- **1/3" 4Megapixel progressive scan CMOS**
- **H.264&MJPEG triple-stream encoding**
- **20fps@4Mp(2560×1440),25/30fps@3Mp(2304×1296)**
- **Smart Detection supported**
- **WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC**
- **Multiple network monitoring: Web viewer, CMS (DSS/PSS) & DMSS**
- **2.7mm ~12mm motorized lens**
- **Maximum IR LEDs Length 50m**
- **IP67, PoE**
- **Micro SD card memory**

V6202IR-T04 Series HD 4MP WDR IP IR Bullet Camera adopts 1/3" progressive scan CMOS, H.264 & MJPEG triple-stream encoding format, and allows image output resolution up to 2560×1440@20fps or 2304×1296@25/30fps.

The camera supports G.711a/G.711u/AAC audio compression. Functioned with ICR day/night switch, White Balance, privacy mask, V6202IR-T04 series is bound to enhance security and convenience for your CCTV surveillance system.

V6202IR-T04 series is widely used in financial institutions, telecommunications, governments, schools, airports, factories, hotels, museums, city streets and other high-resolution surveillance applications.

Technical specifications

Camera	
Image Sensor	1/3" 4Megapixel progressive scan CMOS
Effective Pixels	2688(H) x 1520(V)
Scanning System	Progressive
Electronic Shutter Speed	Auto/Manual, 1/3(4)~1/10000s
Min. Illumination	0.01Lux/F1.4(Color),0Lux/F1.4(IR on)
S/N Ratio	More than 50dB
Video Output	1 port
Camera Features	
Max. IR LEDs Length	50m
Day/Night	Auto (ICR)/Color/B/W
Backlight Compensation	BLC/HLC/WDR(120dB)
White Balance	Auto/Manual
Gain Control	Auto/Manual
Noise Reduction	3D
Privacy Masking	Up to 4 areas
Lens	
Focal Length	2.7~12mm
Max Aperture	F1.4
Focus Control	Motorized
Angle of View	H: 100°~33°
Lens Type	Motorized/ Auto Iris(DC)
Mount Type	Board-in Type
Video	
Compression	H.264/H.264H/H.264B/MJPEG
Resolution	4M (2560×1440)/3M (2304×1296)/720P (1280×720)/D1 (704×576/704×480) CIF (352×288/352×240)
Frame Rate	Main Stream: 4Mp(1~20fps)/3Mp(1~25/30fps) Sub Stream: D1(1~25/30fps) Third Stream: 720P(1-5/8fps)(WDR on); 720P(1-18/2fps)(WDR off)

Bit Rate	H.264: 16K ~ 10Mbps
Corridor Mode	Support
Smart Function	
Smart Detection	Tripwire, Intrusion, Scene change, Face detect
Audio	
Compression	G.711a/G.711u/AAC
Interface	1/1 channel In/Out
Network	
Ethernet	RJ-45 (10/100Base-T)
Wi-Fi	N/A
Protocol	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour
ONVIF	ONVIF,PSIA,CGI
Max. User Access	20
Smart Phone	iPhone, iPad, Android, Windows Phone
Auxiliary Interface	
Memory Slot	Micro SD, Max. 128GB
RS485	N/A
Alarm	2/1 channel In/Out
PIR Sensor Range	N/A
General	
Power Supply	DC12V, PoE (802.3af)
Power Consumption	<11.5W(with IR on, motorized lens working)
Working Environment	-40°C~+60°C, Less than 95% RH
Ingress Protection	IP67
Vandal Resistance	N/A
Dimensions	272.9 mm × 94.9mm× 94.9mm
Weight	1.1Kg

Ordering information

V6202IR-T0420F IR bullet camera, 4.0M, 1/3 inch CMOS, 50m IR range, 12VDC/POE

Accessories (optional)



PFA121



PFA152



PFA151

Dimensions

