

# VS210-T6-PO SERIES

HD 8MP INTELLIGENT STARLIGHT WDR IR IP BOX CAMERA

**Infinova**<sup>®</sup>



## FEATURES

- 1/1.7" progressive scan CMOS
- IR-Cut Removable (ICR) Filter for true Day/Night
- Sensitivity: 0.0001 lux
- High-resolution image signal output: 3840×2160@25fps
- Support multi-frame integrated WDR, with a range up to 120Db
- Built in with motorized zoom lens for quick focus
- H.265/H.264/M-JPEG/SVC encoding formats, available with four video streams
- Support vivid smart functions such as video anomaly detection, behaviour-analysis detection, statistics detection, feature detection
- Support face image optimum selection and duplicate removal; images can be selected by face angles and image resolutions, thus to reduce invalid face uploading, which may occupy the server resources; small face images and big scene images are optional to be uploaded to platforms for secondary analysis and retrieval
- Able to detect human face when tilting up or down  $\pm 20^\circ$ , turning right or left  $\pm 40^\circ$ , or leaning right or left  $30^\circ$
- Able to detect faces with minimum pupil distance of 60 pixels
- Able to detect 32 face images simultaneously in a single scene
- The face detection function can effectively cover various entrances and exits, which reduces the deployment cost
- Support intelligent face exposure
- Support face detection area configuration, large scene monitoring and face capture
- Micro SD card
- Bi-directional audio, G.711-A/G.711-U/G.726/AAC
- 2 alarm inputs, 1 on-off output
- Up to 8 ROI (Region of Interest) areas
- Support simultaneous access and parameter settings via Web Server from multiple clients
- Onvif Profile S/G & T compliant
- Support wide voltage design

# DESCRIPTION

Infinova VS210-T6-P0 Series HD 8MP Intelligent Starlight WDR IP Box Camera applies 1/1.7-inch CMOS sensor.

With H.265/H.264/M-JPEG/SVC video compression formats and 4-stream output, the camera can output high-quality images with resolution up to 3840×2160@25fps, which can not only provide marvelous definition, color restoration and accurate details, but also effectively ensure the intelligent analysis accuracy.

The camera is endowed with vivid smart functions and supports face detection, face capture, etc. The face detection function can be enabled as alarm event to trigger the capture of scene images and small images, which can be uploaded to Infinova smart platform at the same time for secondary recognition and analysis. The product is applicable for Safe City checkpoint video surveillance requirement.

The camera can be widely used for urban security, road monitoring, subway entrance, entrance of shopping mall/supermarket/large scale exhibition hall, railway station, airport and other high-end applications with large flow of people.

# TECHNICAL SPECIFICATIONS

<b>Lens (Visible)</b>		<b>Audio Compression</b>	G.711-A/ G.711-U/ G.726/ AAC
Image Sensor	1/1.7" progressive scan CMOS	<b>Sample Rate</b>	8KHz (for G.711-A/G.711-U/G.726), 16KHz, 32KHz, 44.1KHz and 48KHz (for AAC)
Optical Zoom	-	<b>Audio Interface</b>	1 input, Linear level; 1 output, Linear level
Digital Zoom	-	<b>Two-way Audio</b>	Available
Focal Length	-	<b>Mic &amp; Speaker</b>	-
Iris	DC-AUTO, F1.4	<b>Image</b>	
Focus	Auto/Manual, one-key focus	<b>Shutter</b>	Auto/Manual (1/1s~1/32,000s)
FOV(H/V/D)	H:6.6°~27.2°; V:8.8°~36.9°; D:10.9°~47°	<b>WDR</b>	Up to 120dB
Lens Mount	CS Mount	<b>Exposure</b>	Scene/Manual/Shutter
<b>Lens (Thermal)</b>		<b>Sensitivity</b>	Color mode: 0.001 lux@ F1.4(AGC ON); B/W mode: 0.0001 lux@ F1.4 (AGC ON)
Imager Type	-	<b>White Balance</b>	Auto/Manual/Outdoor
Lens Type	-	<b>Video Adjustment</b>	Brightness, contrast, saturation, hue, sharpness
Spectral Band	-	<b>Noise Reduction</b>	3D
Pixel Size	-	<b>S/N Ratio</b>	≥62dB
NETD	-	<b>Defog</b>	Available
Focal Length	-	<b>EIS</b>	Available
FOV	-	<b>Mirror</b>	Horizontal/Vertical
<b>Video</b>		<b>Corridor Mode</b>	Available
Camera Resolution (Visible Lens)	8MP	<b>Day/Night Switching</b>	ICR
Camera Resolution (Thermal Lens)	-	<b>AGC</b>	Auto/Manual, up to 64X
<b>Max. Coding Capacity (Visible Lens)</b>	Major stream: H.265 -25fps@3840×2160	<b>BLC</b>	Available
	Minor stream: H.265 -25fps@1920×1080	<b>HLC</b>	Available
	Third stream: H.265 -25fps@384×256	<b>Privacy Mask</b>	Up to 4 definable zones
	Fourth stream: H.265 -25fps@720×576	<b>ROI</b>	Up to 8 definable zones
<b>Max. Coding Capacity (Thermal Lens)</b>	Major stream: H.264 -25fps@3840×2160	<b>OSD</b>	Supported
	Minor stream: H.264 -25fps@1280×720	<b>Pan/Tilt Functions</b>	
	Third stream: MJPEG -25fps@1920×1080	<b>Preset</b>	-
	Fourth stream: H.264 -25fps@720×576	<b>Pattern</b>	-
<b>Data Rate</b>	VBR/CBR	<b>Autopan</b>	-
<b>Video Compression</b>	Major stream: 64kbps~16384Kbps	<b>Normal Tour</b>	-
	Minor stream: 64kbps~16384Kbps	<b>Home Return</b>	-
	Third stream: 64kbps~16384Kbps	<b>Timing Tour</b>	-
	Fourth stream: 64kbps~16384Kbps	<b>Autoscan</b>	-
<b>Multi-Streaming</b>	H.265/H.264/M-JPEG/SVC independent coding	<b>Area Zoom</b>	-
<b>Video Rotation</b>	Four - stream independent output	<b>IR Illumination</b>	
<b>Audio</b>	Video can be rotated by 0°, 90°, 180° or 270°	<b>Smart-IR</b>	-
		<b>Wave Length</b>	-
		<b>Night Vision Distance</b>	-

# TECHNICAL SPECIFICATIONS


<b>Temperature Measurement</b>	
Screening Function	-
Measurement	-
Measurement Distance	-
Measurement Range	-
Accuracy	-
<b>Smart Analytics</b>	
Video Analytics	Video Anomaly Detection-Camera tampering, camera shifting, defocus detection, high brightness detection, low brightness detection, video loss detection, color cast detection, and motion detection
	Behaviour Analysis Detection - Wire crossing detection, intrusion detection, object abandoned detection, object lost detection, loitering detection, crowd detection, fast moving detection, target stop detection, and fall over detection
	Sound Detection - Abnormal sound detection and fight detection
	Statistics Detection - Counting, density detection, queue length detection and dwelling detection
	Intelligent Grouping Detection- Behaviour analysis grouping, face capture grouping.
	Face capture - Supports face detection, tracking and capturing.
	Optimum Selection- Supports optimum selection and duplicate removal for captured target images to deliver the best-quality images.
	Face Exposure - Available
	Face attributes - gender, glasses, eyes open, mask, mouth open and facial expression (angry, disgusted, fearful, happy, sad, surprised or neutral)
	Storage
Storage Slots	Support single card
Built-in Storage	up to 512GB
NAS Storage	-
Local PC Recording	Available
<b>Alarm</b>	
Alarm Ports	2 alarm inputs, 1 on-off output
Alarm Input	I/O input, smart events, SD card removal, SD card full of videos, SD card full of images, network disconnection, and heartbeat loss
Alarm Association	I/O output, email, image upload via FTP, audio, alarm info push, SD card snapshot, SD card recording
<b>System Functions</b>	
Operating System	Win 7 and higher versions
Browser	IE8 and higher versions
Access Protocol	ONVIF Profile S/G/T, CGI 2.7
Multiple Access	Up to 20-ch simultaneous access
Web Server	Available
Remote Upgrade	Available
Password Protection	Available
RS485 Port	Available
Analog Video Output	-
Maximum Number of Users	64, with 3 types of users available: administrator, normal user, and operator

Wiper	-
<b>Network</b>	
Network Interface	1 RJ45 10M/ 100M self-adaptive Ethernet port
Network Protocols	IPv4/IPv6, TCP, UDP, IGMP, ICMP, IGMPv2/3, DHCP, SNMP (V1, V2, V3), FTP, SMTP, NTP, RTP, RTSP, RTCP, HTTP, HTTPS, SSL, 802.1x, QoS, PPPoE, DNS, DDNS, ARP, UPnP, IP Filter, TLS, Multicast, SIP
IP Address Filtering	Available
Network Delay	<300ms
<b>Environmental</b>	
Anti-Static	Air discharge: 8KV; contact discharge: 6KV
Surge Protection	Difference mode: ±1KV, common mode: ±2KV
Operating Temperature	5°F~140°F (-15°C~+60°C)
Storage Temperature	-4°F~140°F (-20°C~+60°C)
Operating Humidity	≤ 95% RH
Environmental Rating	-
Impact Resistance	-
<b>Mechanical</b>	
Manual Speed	-
Preset Speed	-
Rotation Angle	-
Preset Accuracy	-
Electric Motor	-
<b>Electrical</b>	
Power Supply	PoE (IEEE 802.3af Class 2) /12VDC /24VAC
Power Consumption	<6.5W
<b>Physical</b>	
Product Dimension (L×W×H) or (H x D)	5.47"×2.97×2.84" (139mm×75.5mm×72mm)
Package Dimension (L x W x H)	8.07"×4.92×3.94" (205mm×125mm×100mm)
Unit Weight	1.21lbs. (0.55Kg)
Shipping Weight	1.54lbs. (0.70Kg)
<b>Certifications</b>	
Product Certifications	CE, FCC, RoHS, UL

# ORDERING INFORMATION

VS210-T6-P0	HD Megapixel Intelligent Starlight WDR IP Box Camera, 8.0MP, 1/1.7" CMOS, Day/night, H.265/H.264/M-JPEG/SVC, Motorized/Non-Motorized zoom lens mount, Smart, PoE/12VDC/24VAC
<b>Accessories</b>	
<b>Lens</b>	
V1182-1150-C8R	Lens, 8.0 Mega pixels, IR correction, f=11~50mm, F/1.4, 1/1.7-inch, CS mount, Manual
V1182-1150-C8R-EE	Lens, 8.0 Mega pixels, IR correction, f=11~50mm, F/1.4, 1/1.7-inch, CS mount, Motorized
<b>Housing</b>	
V1405-10	Camera housing, indoor/outdoor, 10 inch internal
V1405-10S	Camera housing, indoor/outdoor, 10 inch internal, w/ sun shield
V1405-10SHB	Camera housing, indoor/outdoor, 10 inch internal, w/ sun shield, heater & blower, 24VAC
V1405-11SHB	Camera housing, indoor/outdoor, 11 inch internal, w/ sun shield, heater & blower, 24VAC
V1406-11SHB	Camera housing, indoor/outdoor, 11 inch internal, pneumatic supporting lid, w/ sun shield, heater & blower, 24VAC
V1406-11SHB + V1406W	Camera housing, indoor/outdoor, 11 inch internal, pneumatic supporting lid, w/ sun shield, heater & blower, 24VAC + Wiper for V1406 camera housing, 24VAC
V1405-11SHB-IR-1	IR Camera housing, indoor/outdoor, 11 inch internal, pneumatic supporting lid, w/ sun shield, heater & blower, 15°, 120m, 24VAC
V1405-11SHB-IR-2	IR Camera housing, indoor/outdoor, 11 inch internal, pneumatic supporting lid, w/ sun shield, heater & blower, 30°, 100m, 24VAC
V1405-11SHB-IR-3	IR Camera housing, indoor/outdoor, 11 inch internal, pneumatic supporting lid, w/ sun shield, heater & blower, 45°, 70m, 24VAC
V1405-11SHB-IR-4	IR Camera housing, indoor/outdoor, 11 inch internal, pneumatic supporting lid, w/ sun shield, heater & blower, 60°, 50m, 24VAC
<b>Housing Bracket</b>	
V1571-W	Wall Mount, H/V adjustable for housing (V1405), 33.07 lbs (15 kg) load
V1572-W	Wall Mount, Non - Adjustable for housing (V1405, V1406, V1407), 121.25 lbs. (55 kg) load
V1573	Wall Mount, H/V adjustability for housing (V1405, V1406, V1407), 44.09 lbs (20 kg) load
V1573-2	Wall Mount, H/V adjustability for housing (V1405, V1406, V1407), 44.09 lbs (20 kg) load
V1573-A	Wall Mount, H/V adjustability for housing (V1405-11SHB-IR), 88.19 lbs. (40 kg) load, Cable Management
<b>Power Supply</b>	
N3921-12D-1	AC to DC Power Supply, Plug-In, 230VAC, Output 12VDC, 1.5A
N3921-24A-2	AC to AC Power Supply, Plug-In, 230VAC, Output 24VAC, 1A
N3922-30P-2	Smart POE Injector, 100VAC-240VAC input, 30W output

# DIMENSIONS

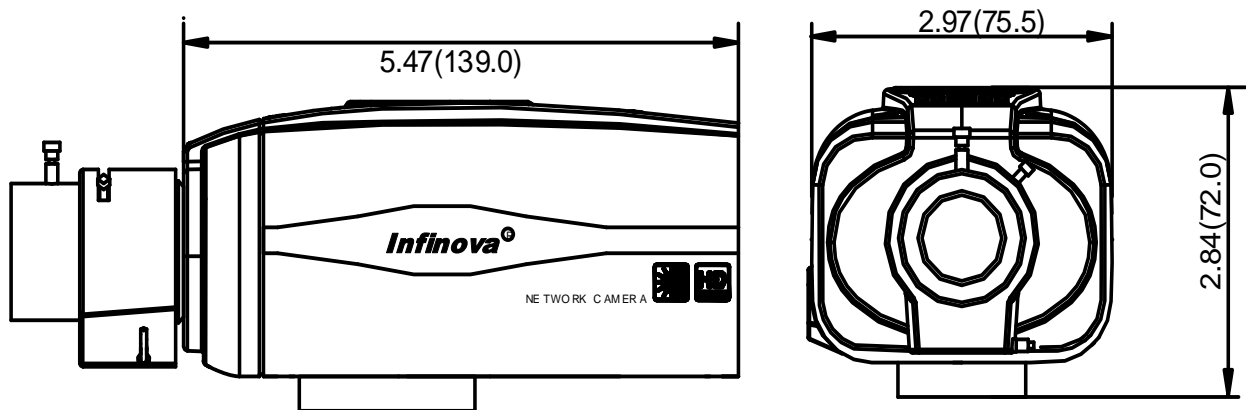

(Unit: inch, in the parentheses is mm)