

V1406-15S-L SERIES

INDOOR/ OUTDOOR MEDIUM CAMERA HOUSING

Infinova[®]



FEATURES

- Medium-sized, for indoor/outdoor installations
- HD dust and water-resistant glass
- Cable glands and entry ports available on the bottom of the housing
- Water-proof ventilated valve design
- Sunshield used to lower the internal temperature by 3°C~5°C
- Die-casting aluminium construction
- Internal usable dimensions (L×W×H) of 250mm×90mm×75mm to allow the camera and lens
- Pigtail available for VS210-Q/T series cameras
- Applicable for VS210-Q/T series cameras
- IP66
- Mounts optional with V1573-A wall mount (cable routing inside the housing) and V1573-B cross-bar mount

The V1406-15S-L series camera housings are made of die-casting aluminium for both indoor and outdoor installations. The housing is designed to accommodate VS210-Q/T series face capture camera with lens, applicable for outdoor applications for face detection and capture.

TECHNICAL SPECIFICATIONS

Physical


Model	V1406-15S-L
Camera Mounting	Mounting groove and holes available on the camera supporting plate; applicable for VS210-Q/T series cameras
Internal Usable Dimensions (L×W×H)	9.84"×3.54"×2.95" (250mm×90mm×75mm)
Window Thickness	0.12" (3mm)
Window Dimensions (W×H)	Ø2.66" (67.6mm)
Cable Input	Cable diameter of 0.43" (11 mm)
Construction	Die-cast aluminium

Unit Dimensions (L×W×H)	15.35"×5.71"×5.09" (390mm×145.1mm×129.2mm)
Box Dimensions (L×W×H)	18.11"×8.46"×9.06" (460mm×215mm×230mm)
Unit Weight	7.85 lbs. (3.56kg)
Shipping Weight	9.70 lbs. (4.4kg)
Mounting	Wall Mount, Cross-bar Mount
Power Supply	No independent power supply
Auto Temperature Control	Heater: N/A
Environment	Indoor/outdoor
IP Rate	IP66
Certifications and Approval	
Product Certifications	IP66, FCC, CE


ORDERING INFORMATION

V1406-15S-L	Camera Housing, Indoor/outdoor, 15-inch internal, With sunshield, die-casting aluminium construction, IP66, With pigtail for VS210 camera
Accessories	
Mount	
V1573-A	Wall Mount for VS351 Integrated Camera and V1405-10SHB-A, V1405-10SHBP, V1405-11SHBP, H/V adjustable for housing, 88.19 lbs. (40 kg) load, Cable Management
V1573-B	Cross-bar Mount, H/V adjustable for VS351 integrated camera and V1406-15S-L housing, 33.07 lbs. (15 kg) load

DIMENSIONS

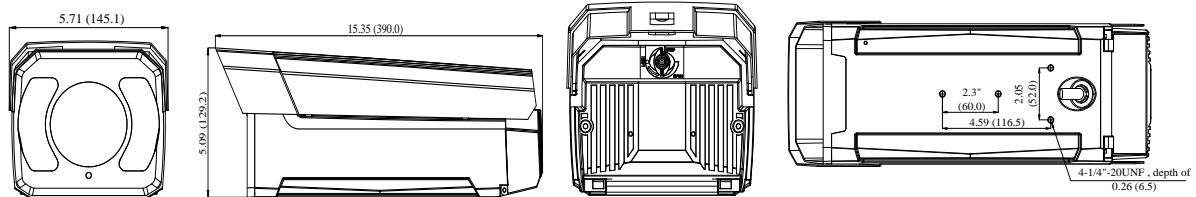

V1573-A

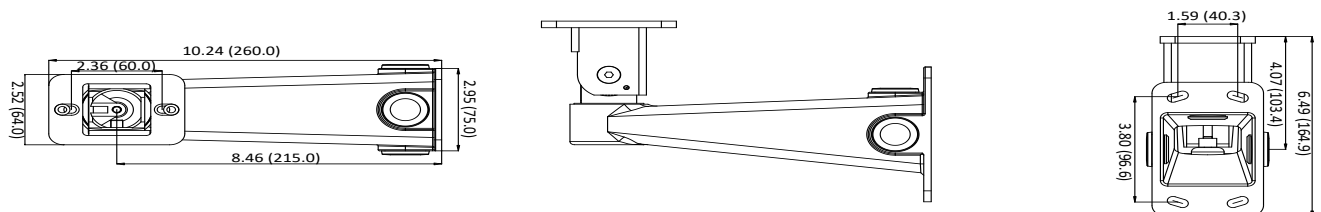

V1573-B

