


# VT210-A2-A0 Series

## H265 HD Megapixel Smart Starlight WDR IP Box Camera

**Infinova**<sup>®</sup>  
The Integrator's Manufacturer

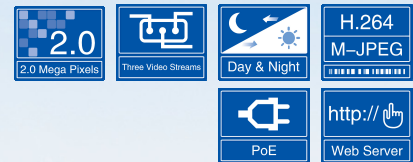

- **1/1.9" progressive scan CMOS sensor**
- **IR-Cut Removable (ICR) Filter for Day/Night switching**
- **Star-grade sensitivity: 0.0002 lux**
- **Supports frame integration WDR, with dynamic range up to 120dB**
- **High-resolution image signal output: 1920×1080@30fps**
- **Auto Back Focus (ABF)**
- **Smart functions for perimeter protection (wire cross and regional invasion detection) and feature protection (field of view change, defocus, too dark, and too light detection)**
- **Three Simultaneous Video Streams: Dual H.265 & M-JPEG or Dual H.264 & Scalable M-JPEG**
- **Supports TF card storage/NAS**
- **Support alarm recording and event recording (including broken network)**
- **Supports alarm snapshot and event snapshot**
- **Bi-directional audio, G.711a and G.711u**
- **2 alarm inputs, 1 on-off output**
- **Support multiple ways to trigger and handle alarms**
- **Up to four definable privacy mask areas**
- **Up to eight ROI (Region of Interest) areas**
- **Support simultaneous access and parameter setting via Web Server from multiple clients**
- **Compatible or able to integrate with digital video surveillance software, and other video surveillance software**
- **ONVIF Profile S compliant**
- **Standard SDK is provided for easy integration with other video surveillance software**
- **Analog Video Debugging Interface is provided**
- **Wide voltage design**

Infinova's VT210-A2-A0 series H265 HD megapixel smart starlight WDR IP box camera allows image output resolution up to 1920×1080@30fps. The camera provides excellent resolution and color reproduction, acquires richer and more accurate details and guarantees intelligent analysis accuracy in a more effective way, which caters for different application needs.

VT210-A2-A0 series boasts of rich intelligent functions, such as wire cross detection, regional invasion detection, field of view change detection, defocus detection, too dark detection and too light detection. The camera applies to various high-end businesses.

VT210-A2-A0 series camera is designed for safe city, rail transit and municipal construction. Particularly, it is widely used in city public security, highway, metro, station, exhibition hall, etc.

## Technical specifications

Image Sensor	1/1.9" progressive scan CMOS
Lens Mount	C/CS
ABF	Available
Auto Iris	DC drive
Day/Night Functionality	ICR
Sensitivity	Color mode: 0.002lux @ F1.2; B/W mode: 0.0002lux@F1.2
Exposure	Auto/Manual
Shutter	Auto/Manual (1/30s~1/10000s)
DSS	Available
AGC	Auto/Manual
White Balance	Auto/Manual/Outdoor
WDR	120dB
Video Adjustment	Brightness, contrast, saturation, hue and sharpness adjustable
Noise Reduction	3D
Anti-fog	Available
EIS	Available
Corridor Mode	Available
HLC	Available
Image Mirror	Horizontal/Vertical mirror
Video Compression	H.265/H.264/M-JPEG
Coding Capacity	1080P@30fps+720P@30fps+MJPEG1080P@5fps
Audio Compression	G.711a/G.711u
Audio Port	1 input (Linear level, Resistance: 1000 Ohm), 1 output (Linear level, Resistance: 600 Ohm)
Audio Code Rate	8KHz, 12KHz 16KHz, 24KHz, 44KHz, 48KHz
Web Server	Available
Upgrade Online	Available
Password Protection	Available
Smart Video Analytics	Wire cross detection, regional invasion detection, field of view change detection, defocus detection, too dark detection, too light detection
Timing Functions	Timing recording and snapshot
SD Card Storage	Up to 128G

TF Card Storage	Available
Mirror Storage	Videos in TF card can be automatically uploaded to the VMS or NVR after network is reconnected
Privacy Mask	Up to 4 masks
ROI	Up to 8 regions
Access Protocols	ONVIF2.4, CGI
Network Port	One RJ45 10/100M self-adaptive Ethernet port
Available Protocols	IPv6, TCP, UDP, IGMP, DHCP, FTP, SNMP (V3), SMTP, NTP, RTP, RTSP, RTCP, HTTP, HTTPS, TSL, SSL, QoS, PPPoE, DNS, DDNS, ARP, ICMP, UPnP
Alarm	2 alarm inputs, 1 on-off output
Alarm Input	I/O input, broken network, motion detection, smart alarm
Alarm Association	I/O output, mail, snapshot, FTP upload, audio, TF card recording, sending alarm
RS485 Port	1-ch RS485 port
Analog Video Output	1-ch BNC connector
Operating System	Windows XP, Windows Vista, Win7, Win8
Browser	IE7, IE8, IE9, IE10, IE11
Power Supply	12VDC±15%/24VAC (±25%)/PoE(802.3AF)
Power Consumption	<6.5W
Operating Temperature	-22°F ~ 140°F (-30°C ~ 60°C) (with/heater)
Storage Temperature	-4°F ~ 140°F (-20°C ~ 60°C)
Operating Humidity	0%~95% RH (non-condensing)
Unit Dimensions (L×W×H)	5.47"×2.97×2.84" (139mm×75.5mm×72mm) (excluding BNC)
Box Dimensions (L×W×H)	8.07"×4.92×3.94" (205mm×125mm×100mm)
Unit Weight	1.21lbs. (0.55Kg)
Shipping Weight	1.54lbs. (0.70Kg)
ONVIF Profile G	Supported

### Certifications and Approval

Product Certifications CE/EMC: EN 55022, EN 55024, EN 61000-3-2, EN 61000-3-3<sup>1</sup>, FCC: Part 15 Subpart B Class A<sup>2</sup>, UL<sup>3</sup>

Certificate No.: <sup>1</sup>CTL1508212422-E; <sup>2</sup>CTL1508212422-F; <sup>3</sup>E232008-A52


## Ordering information

VT210-A2-A0 H265 HD Megapixel Smart Starlight WDR IP Box Camera, 2.0MP, 1/1.9 inch CMOS sensor, Day/night, H.265/H.264/MJPEG, PoE/12VDC/24VAC

### Accessories

V1551-7 7" camera bracket  
V1551-10 10" camera bracket

## Dimensions

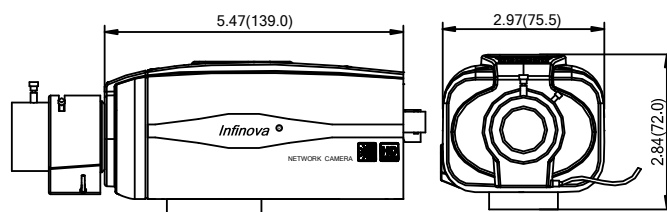

(Unit: inch, in the parentheses is mm)